

Lecture 2

- ▶ Linearization
- ▶ Stability definitions
- ▶ Stability and controllability from linearization
- ▶ Simulation in Matlab/Simulink

Material

- ▶ Glad& Ljung Ch. 11, 12.1, (Khalil Ch 2.3, part of 4.1, and 4.3)
- ▶ Lecture slides

Today's Goal

To be able to

- ▶ linearize, both around equilibria and trajectories
- ▶ explain definitions of stability
- ▶ check local stability and local controllability at equilibria
- ▶ simulate in Simulink

Linearization Around a Trajectory

Idea: Make Taylor-expansion around a known solution $\{x^*(t), u^*(t)\}$.


Let

$$\frac{dx^*}{dt} = f(x^*(t), u^*(t))$$

be a known solution.

How will a small deviation $\{\tilde{x}, \tilde{u}\}$ from this solution behave?

$$\frac{d(x^* + \tilde{x})}{dt} = f(x^*(t) + \tilde{x}(t), u^*(t) + \tilde{u}(t))$$




Linearization Around a Trajectory, cont.

Let $(x^*(t), u^*(t))$ denote a solution to $\dot{x} = f(x, u)$ and consider another solution $(x(t), u(t)) = (x^*(t) + \tilde{x}(t), u^*(t) + \tilde{u}(t))$:

$$\begin{aligned} \dot{x}(t) &= f(x^*(t) + \tilde{x}(t), u^*(t) + \tilde{u}(t)) \\ &= f(x^*(t), u^*(t)) + \frac{\partial f}{\partial x}(x^*(t), u^*(t))\tilde{x}(t) + \frac{\partial f}{\partial u}(x^*(t), u^*(t))\tilde{u}(t) + \mathcal{O}(\|\tilde{x}, \tilde{u}\|^2) \end{aligned}$$

$$\dot{\tilde{x}}(t) = \frac{\partial f}{\partial x}(x^*(t), u^*(t))\tilde{x}(t) + \frac{\partial f}{\partial u}(x^*(t), u^*(t))\tilde{u}(t) + \mathcal{O}(\|\tilde{x}, \tilde{u}\|^2)$$



State-space form

Hence, for small (\tilde{x}, \tilde{u}) , approximately

$$\dot{\tilde{x}}(t) = A(t)\tilde{x}(t) + B(t)\tilde{u}(t)$$

where (if $\dim x = 2, \dim u = 1$)

$$A(t) = \frac{\partial f}{\partial x}(x^*(t), u^*(t)) = \begin{bmatrix} \frac{\partial f_1}{\partial x_1} & \frac{\partial f_1}{\partial x_2} \\ \frac{\partial f_2}{\partial x_1} & \frac{\partial f_2}{\partial x_2} \end{bmatrix} (x^*(t), u^*(t))$$

$$B(t) = \frac{\partial f}{\partial u}(x^*(t), u^*(t)) = \begin{bmatrix} \frac{\partial f_1}{\partial u_1} \\ \frac{\partial f_2}{\partial u_1} \end{bmatrix} (x^*(t), u^*(t))$$

Note that A and B are **time dependent!** However, if we don't linearize around a trajectory but linearize around an equilibrium point $(x^*(t), u^*(t)) \equiv (x^*, u^*)$ then A and B are **constant**.

Linearization, cont'd

The linearization of the output equation

$$y(t) = h(x(t), u(t))$$

around the nominal output $y^*(t) = h(x^*(t), u^*(t))$ is given by

$$\tilde{y}(t) = C(t)\tilde{x}(t) + D(t)\tilde{u}(t)$$

where (if $\dim y = \dim x = 2, \dim u = 1$)

$$C(t) = \frac{\partial h}{\partial x}(x^*(t), u^*(t)) = \begin{bmatrix} \frac{\partial h_1}{\partial x_1} & \frac{\partial h_1}{\partial x_2} \\ \frac{\partial h_2}{\partial x_1} & \frac{\partial h_2}{\partial x_2} \end{bmatrix} (x^*(t), u^*(t))$$

$$D(t) = \frac{\partial h}{\partial u}(x^*(t), u^*(t)) = \begin{bmatrix} \frac{\partial h_1}{\partial u_1} \\ \frac{\partial h_2}{\partial u_1} \end{bmatrix} (x^*(t), u^*(t))$$

Example - Linearization around equilibrium point


The linearization of

$$\ddot{x}(t) = \frac{g}{l} \sin x(t)$$

around the equilibrium $x^* = n\pi$ is given by

$$\ddot{\tilde{x}}(t) = \frac{g}{l} \sin(n\pi + \tilde{x}(t)) \approx \frac{g}{l} (-1)^n \tilde{x}(t)$$

Example: Rocket



$$\begin{aligned} \dot{h}(t) &= v(t) \\ \dot{v}(t) &= -g + \frac{v_e u(t)}{m(t)} \\ \dot{m}(t) &= -u(t) \end{aligned}$$

Let $u^*(t) \equiv u^* > 0$; $x^*(t) = \begin{bmatrix} h^*(t) \\ v^*(t) \\ m^*(t) \end{bmatrix}$; $m^*(t) = m^* - u^*t$.

$$\text{Linearization: } \dot{\tilde{x}}(t) = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & \frac{-v_e u^*}{m^*(t)^2} \\ 0 & 0 & 0 \end{bmatrix} \tilde{x}(t) + \begin{bmatrix} 0 \\ \frac{v_e}{m^*(t)} \\ -1 \end{bmatrix} \tilde{u}(t)$$

Outline

- ▶ Linearization
- ▶ **Stability definitions**
- ▶ Stability and controllability from linearization
- ▶ Simulation in Matlab/Simulink


Local Stability

Consider $\dot{x} = f(x)$ where $f(x^*) = 0$

Definition The equilibrium x^* is **stable** if, for any $R > 0$, there exists $r > 0$, such that

$$\|x(0) - x^*\| < r \implies \|x(t) - x^*\| < R, \quad \text{for all } t \geq 0$$

Otherwise the equilibrium point x^* is **unstable**.



Asymptotic Stability

Definition The equilibrium x^* is **locally asymptotically stable (LAS)** if it

- 1) is stable
- 2) there exists $r > 0$ so that if $\|x(0) - x^*\| < r$ then

$$x(t) \rightarrow x^* \quad \text{as } t \rightarrow \infty.$$

(PhD-exercise: Show that 1) does not follow from 2))

Global Asymptotic Stability

Definition The equilibrium is said to be **globally asymptotically stable (GAS)** if it is LAS and for all $x(0)$ one has

$$x(t) \rightarrow x^* \quad \text{as } t \rightarrow \infty.$$

- ▶ Linearization
- ▶ Stability definitions
- ▶ **Stability and controllability from linearization**
- ▶ Simulation in Matlab/Simulink

Lyapunov's Linearization Method

Theorem Assume

$$\dot{x} = f(x)$$

has the linearization

$$\frac{d}{dt}(x(t) - x^*) = A(x(t) - x^*)$$

around the equilibrium point x^* and put

$$\alpha(A) = \max \operatorname{Re}(\lambda(A))$$

- ▶ If $\alpha(A) < 0$, then $\dot{x} = f(x)$ is LAS at x^* ,
- ▶ If $\alpha(A) > 0$, then $\dot{x} = f(x)$ is unstable at x^* ,
- ▶ If $\alpha(A) = 0$, then no conclusion can be drawn.

(Proof in Lecture 4)

Example

The linearization of

$$\begin{aligned} \dot{x}_1 &= -x_1^2 + x_1 + \sin(x_2) \\ \dot{x}_2 &= \cos(x_2) - x_1^3 - 5x_2 \end{aligned}$$

at $x^* = \begin{pmatrix} 1 \\ 0 \end{pmatrix}$ gives $A = \begin{pmatrix} -1 & 1 \\ -3 & -5 \end{pmatrix}$

Eigenvalues are given by the *characteristic equation*

$$0 = \det(\lambda I - A) = (\lambda + 1)(\lambda + 5) + 3$$

This gives $\lambda = \{-2, -4\}$, which are both in the left half-plane, hence the *nonlinear system* is LAS around x^* .

Local Controllability

Theorem Assume

$$\dot{x} = f(x, u)$$

has the linearization

$$\frac{d\tilde{x}}{dt} = A\tilde{x} + B\tilde{u}$$

around the equilibrium (x^*, u^*) then the nonlinear system is *locally controllable* provided that (A, B) controllable.

Here local controllability is defined as follows:

For every $T > 0$ and $\varepsilon > 0$ the set of states $x(T)$ that can be reached from $x(0) = x^$, by using controls satisfying $\|u(t) - u^*\| < \varepsilon$, contains a small ball around x^* .*

5 minute exercise:

Is the ball and beam

$$\ddot{x} = x\dot{\phi}^2 + g \sin \phi + \frac{2r}{5} \ddot{\phi}$$

nonlinearly locally controllable around

$$\dot{\phi} = \phi = x = \dot{x} = 0 \text{ (with } \ddot{\phi} \text{ as input)?}$$

Remark: This is a bit more detailed model of the ball and beam than we saw in Lecture 1.

2016 IEEE Intelligent Vehicles Symp., Gothenburg



[Evestedt, Ljungqvist, Axehill] More parking in lecture 12.

Example

An inverted pendulum with vertically moving pivot point



$$\ddot{\phi}(t) = \frac{1}{l} (g + u(t)) \sin(\phi(t)),$$

where $u(t)$ is acceleration, can be written as

$$\begin{aligned} \dot{x}_1 &= x_2 \\ \dot{x}_2 &= \frac{1}{l} (g + u) \sin(x_1) \end{aligned}$$

Example, cont.

The linearization around $x_1 = x_2 = 0, u = 0$ is given by

$$\begin{aligned} \dot{x}_1 &= x_2 \\ \dot{x}_2 &= \frac{g}{l} x_1 \end{aligned}$$

It is not controllable, hence no conclusion can be drawn about nonlinear controllability

However, simulations show that the system is stabilized by

$$u(t) = \varepsilon \omega^2 \sin(\omega t)$$

if ω is large enough !

Demonstration We will come back to this example later.

Bonus — Discrete Time

Many results are parallel (observability, controllability,...)

Example: The difference equation

$$x_{k+1} = f(x_k)$$

is asymptotically stable at x^* if the linearization

$$\left. \frac{\partial f}{\partial x} \right|_{x^*} \text{ has all eigenvalues in } |\lambda| < 1$$

(that is, within the unit circle).


Example (cont'd): Numerical iteration

$$x_{k+1} = f(x_k)$$

to find fixed point

$$x^* = f(x^*)$$

When does the iteration converge?



Outline

- ▶ Linearization
- ▶ Stability definitions
- ▶ Stability and controllability from linearization
- ▶ Simulation in Matlab/Simulink

Simulation

Often the only method

$$\dot{x} = f(x)$$

- ▶ ACSL
- ▶ Simnon
- ▶ Simulink


$$F(\dot{x}, x) = 0$$

- ▶ Omsim
- ▶ Dymola
- ▶ Modelica (www.modelica.org)

Special purpose

- ▶ Spice (electronics)
- ▶ EMTP (electromagnetic transients)
- ▶ Adams (mechanical systems)


Simulink

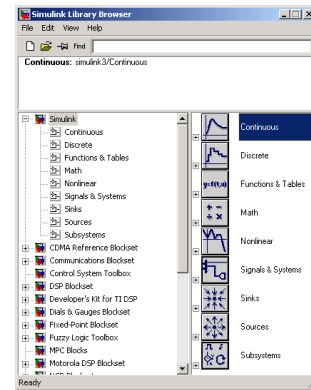


```
> matlab
>> simulink
```

Simulink, An Example

File -> New -> Model
 Double click on Continuous
 Transfer Fcn
 Step (in Sources)
 Scope (in Sinks)
 Connect (mouse-left)
 Simulation->Parameters




Choose Simulation Parameters

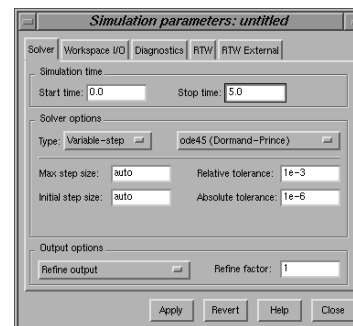

Don't forget "Apply"

Save Results to Workspace



Check "Save format" of output blocks ("Array" instead of "Structure")


```
>> plot(t,y)
```

(or use "Structure" which also contains the time information.)

How To Get Better Accuracy

Modify Refine, Absolute and Relative Tolerances, Integration method

Refine adds interpolation points:

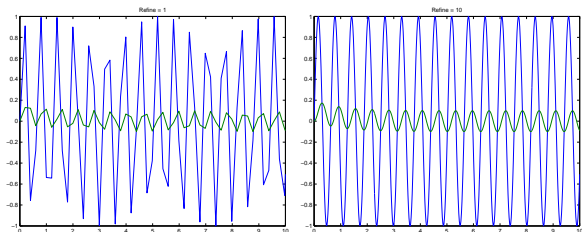

Use Scripts to Document Simulations

If the block-diagram is saved to stepmodel.mdl, the following Script-file simstepmodel.m simulates the system:

```
open_system('stepmodel')
set_param('stepmodel','RelTol','1e-3')
set_param('stepmodel','AbsTol','1e-6')
set_param('stepmodel','Refine','1')
tic
sim('stepmodel',6)
toc
subplot(2,1,1),plot(t,y),title('y')
subplot(2,1,2),plot(t,u),title('u')
```


Submodels, Example: Water tanks

Equation for one water tank:


$$\dot{h} = (u - q)/A$$

$$q = a\sqrt{2g}\sqrt{h}$$

Corresponding Simulink model:




Make a subsystem and connect two water tanks in series.



Linearization in Simulink

Use the command `trim` to find e.g., stationary points to a system

```
>> A=2.7e-3;a=7e-6,g=9.8;
>> % Example to find input u for desired states/output
>> [x0,u0,y0]=trim('flow',[0.1 0.1]',[],0.1)
x0 =
    0.1000
    0.1000
u0 =
    8.3996e-06
y0 =
    0.1000
```

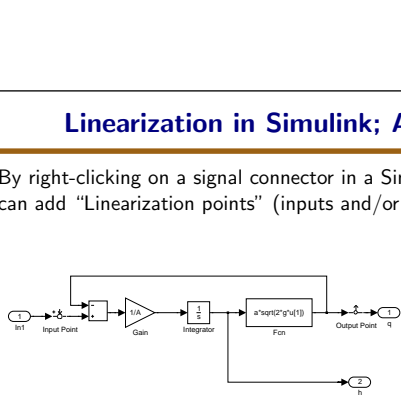

Start a "Control and Estimation Tool Manager" to get a linearized model by
Tools -> Control Design -> Linear analysis ...

where you can set the operating points, export linearized model to Workspace (Model- \bar{z} Export to Workspace) and much more.

Summary

- ▶ Linearization, both around equilibria and trajectories
- ▶ Definitions of local and global stability
- ▶ Check local stability and local controllability at equilibria
- ▶ Simulation tool in this course: Simulink

Next Lecture, Friday November 3

- ▶ Phase plane analysis
- ▶ Classification of equilibria


Linearization in Simulink, cont.

Use the command `linmod` to find a linear approximation of the system around an operating point:

```
>> [aa,bb,cc,dd]=linmod('flow',x0,u0);
>> sys=ss(aa,bb,cc,dd);
>> bode(sys)
```

Computer exercise

Simulation of JAS 39 Gripen

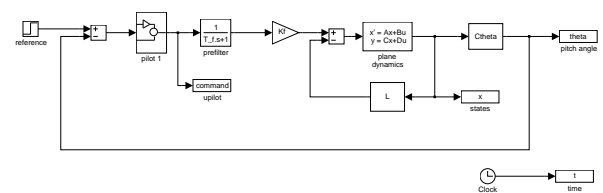

- ▶ Simulation
- ▶ Analysis of PIO using describing functions
- ▶ Improve design